



输送机 conveyor

1) 斗式提升机 Bucket Elevator

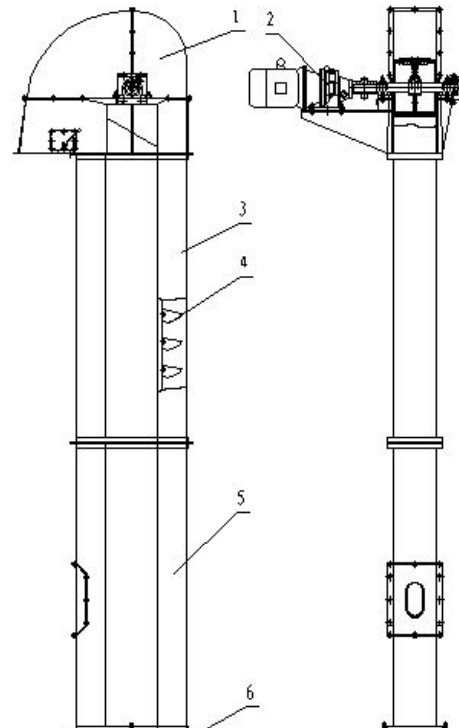

Technical Parameters

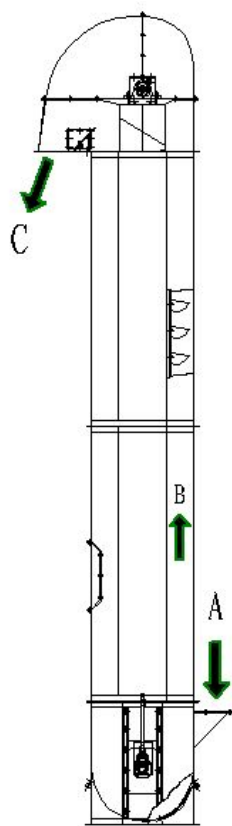


No.	Model	Conveying capacity		Linear speed of bucket belt		Diameter of head sheave(mm)	Max. lifting height
		(t/h)		(m/s)			(m)
		Granular stock	Powdery stock	V-belt driving	Direct driving		
1	DSTSJ-14/10	2--4	1--2	1.26	---	140	15
2	DSTSJ-20/13	5--7	3--5	1.6	1.6	200	16
3	DSTSJ-26/13	15-20	8--12	2.5	2.1	260	20
4	DSTSJ-30/18	25--35	15-25	2.6	2.45	300	25
5	DSTSJ-40/23	40-45	20-25	---	2.85	400	32
6	DSTSJ-50/28	60-75	---	---	3	500	40
7	DSTSJ-60/33	100-150	---	---	3.1	600	45

2) 螺旋输送机 screw conveyor



Technical Parameters

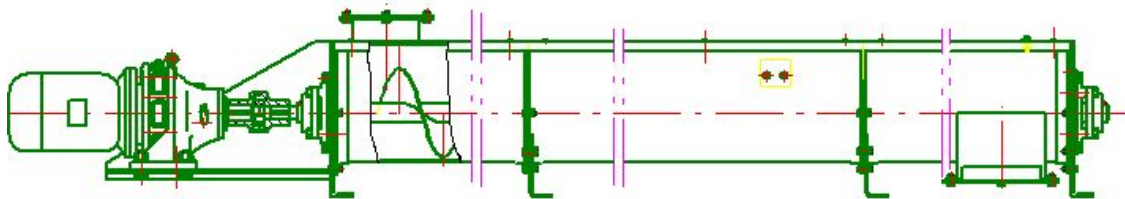

Model	CMEC-LS160	CMEC-LS200	CMEC-LS250	CMEC-LS320	CMEC-LS400
Pitch	160	200	250	260	320
Tolerance	± 2	± 2	± 4	± 4	± 4
Screw diameter	160	200	250	320	400
Tolerance	10	10	10	10	10

We supply all kinds of conveyors .If you need any types,please contact us and we will try our best to meet your needs.