


## 牵引器 hand puller

There are 1 ton-4ton series hand pullers with different technical data.we just take one picture for display.If you want to know much information,please contact us directly.

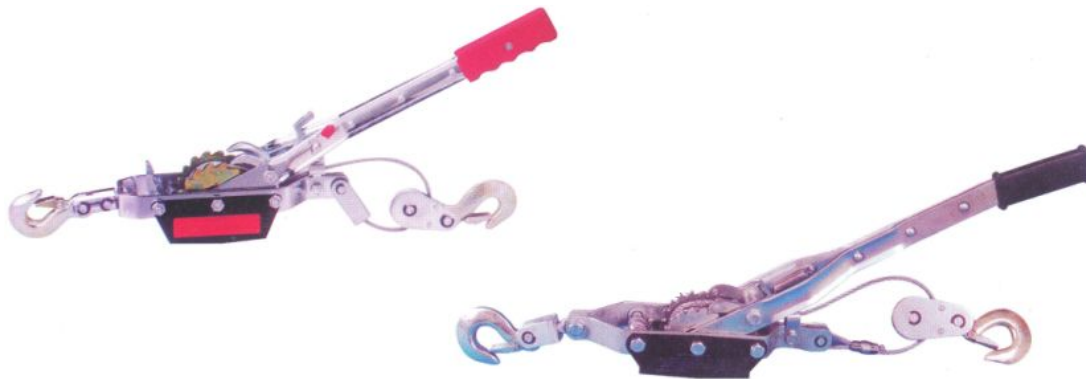

### TECHNICAL DATA FOR 2TON & 3TON HAND PULLER

| 名称 Name                                                   | 型号 Model | 额定拉力<br>Rated pull(KN) | Cable size |           | 有效行程<br>Effective distance(m) | 每箱台数<br>Pieces in each box | N.W/<br>GW<br>净重<br>毛重 | 包装尺寸<br>Package size(cm) |
|-----------------------------------------------------------|----------|------------------------|------------|-----------|-------------------------------|----------------------------|------------------------|--------------------------|
|                                                           |          |                        | Diam (mm)  | Length(m) |                               |                            |                        |                          |
| 2T3-hook & single-wheel-puller                            | QSS2 TB1 | 9.8                    | 4.8        | 3.0       | 2.2                           | 6                          | 19.5/<br>21.5          | 61X26X<br>22             |
| 2T3-hook & double-wheel-puller                            | QSS2 TB2 | 9.8                    | 4.8        | 3.0       | 2.2                           | 6                          | 20.5/<br>22.5          | 61X26X<br>22             |
| 2T Top grade of 2-hook&double wheel-puller                | QSS2 TC2 | 14.7                   | 5.1        | 3.0       | 1.1                           |                            | 19/21                  | 61X26X<br>22             |
| 2T Top grade of 3-hook&double wheel-puller                | QSS2 TD2 | 14.7                   | 5.1        | 3.0       | 1.1                           |                            | 19/21                  | 61X26X<br>22             |
| 2T Top grade colored ribbon of 2-hook&double wheel-puller | QSS2 TE2 | 1.8x25                 |            | 4.5       | 2.1                           |                            | 19/21                  | 61X26X<br>22             |
| 3T2-hook & single-wheel-puller                            | QSS3 TA1 | 14.7                   | 5.1        | 3.3       | 1.2                           | 4                          | 17/19                  | 71X21X<br>27             |
| 3T2-hook & double-wheel-puller                            | QSS3 TA2 | 14.7                   | 5.1        | 3.3       | 1.2                           | 4                          | 18.5/<br>20            | 71X21X<br>27             |
| 3T3-hook&single wheel-puller                              | QSS3 TB1 | 14.7                   | 5.1        | 3.3       | 2.4                           | 4                          | 18/20                  | 71X21X<br>27             |
| 3T3-hook& double wheel-puller                             | QSS3 TB2 | 14.7                   | 5.1        | 3.3       | 2.4                           | 4                          | 19/21                  | 71X21X<br>27             |

**手动绞车系列 Winch series**



**TECHNICAL DATA FOR 800LBS&2500LBS HAND WINCH**

| Name                 | Model | Rated pull<br>LBS(<br>kg) | Cable size |            | Gear ratio       | Handle length(m) | Drum-hub dia(m) | Size of colored belf(m) | Pieces in each box | Size of package(cm) |
|----------------------|-------|---------------------------|------------|------------|------------------|------------------|-----------------|-------------------------|--------------------|---------------------|
|                      |       |                           | Diam (mm)  | Length (m) |                  |                  |                 |                         |                    |                     |
| 手动绞车<br>Handle winch | T06   | 600(270)                  | 4.2        | 8          | 3.1: 1           | 165              | 16              | 1.0X50X8                | 6                  | 59x26x16            |
|                      | T08   | 800(360)                  | 4.2        | 8          | 3.1: 1           | 175              | 16              | 1.0X50X8                | 6                  | 59x26x16            |
|                      | T10   | 1000(450)                 | 4.5        | 10         | 4.1: 1           | 200              | 18              | 1.2X50X8                | 6                  | 66x27x18            |
|                      | T12   | 1200(540)                 | 4.5        | 10         | 4.1: 1           | 225              | 18              | 1.4X50X8                | 6                  | 66x27x18            |
|                      | T14   | 1400(630)                 | 4.5        | 10         | 4.5: 1           | 225              | 18              | 1.6X50X8                | 6                  | 67x27x19            |
|                      | T16   | 1600(720)                 | 4.8        | 10         | 5.1: 1           | 225              | 20              | 1.6X50X8                | 4                  | 46x31x20            |
|                      | T18   | 1800(810)                 | 4.8        | 10         | 4.1: 1<br>9.8: 1 | 250              | 20              | 1.8X50X8                | 4                  | 52x31x20            |
|                      | T20   | 2000(900)                 | 5          | 10         | 4.1: 1<br>9.8: 1 | 250              | 20              | 1.8X50X8                | 4                  | 52x31x20            |
|                      | T20B  | 2000(900)                 | 5          | 10         | 4.1: 1<br>9.8: 1 | 250              | 42              | 1.8X50X8                | 4                  | 52x31x20            |
|                      | T25   | 2500(1100)                | 5          | 10         | 5.1: 1<br>12.2:1 | 275              | 42              | 2.0X50X8                | 4                  | 52x31x22            |

蜗杆绞车 Turbo-rod Winches




TECHNICAL DATA FOR 1500LBS&2500LBS TURBO-ROD SERIES

| Name                   | Model | Rated pull<br>LBS(K<br>G) | Cable size  |               | Gear<br>ratio | Drum-<br>hub dia<br>(mm) | Handle<br>length(<br>mm) | Pieces<br>in each<br>box | Package<br>size(cm) |
|------------------------|-------|---------------------------|-------------|---------------|---------------|--------------------------|--------------------------|--------------------------|---------------------|
|                        |       |                           | Dia<br>(mm) | Length<br>(m) |               |                          |                          |                          |                     |
| Turbo-<br>rod<br>winch | KW15  | 1500(6<br>80)             | 4.8         | 15            | 3.1:1         | 38                       | 280                      | 4                        | 41X34X23.5          |
|                        | KW20  | 2000(9<br>00)             | 5.0         | 15            | 4.1:1         | 38                       | 280                      | 4                        | 41X34X23.5          |
|                        | KW25  | 2500(1<br>100)            | 5.6         | 30            | 5.1:1         | 50                       | 280                      | 4                        | 41X34X23.5          |

PARTIAL PRODUCTS 部分产品展示



Japanese style puller JP001  
Parameter:rated pull 1T  
Cable size:diameter 5x2.2m

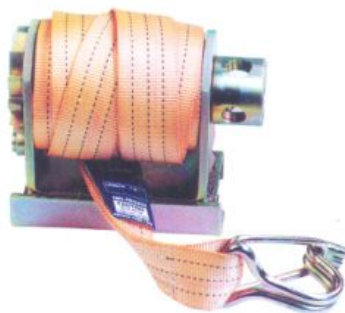

pulley S001  
parameter rated pull 2T  
colored ribbon 1.8mmx2inchx30ft



Pulley S002 rated pull 3T  
Colored ribbon: 2.2mmx2inchx30ft



Diameter 4.5x3.2 m



JP002 rated pull 1.5T  
Cable size diameter 6x2.2m



4T/8T LIFT HOOK  
Rated pull : 2T/4T



QSS1TA1

**Hebei-CMEC Metals & Machinery I/E Corps.**




QSS2TA1



QSS2TA2



QSS1TA2

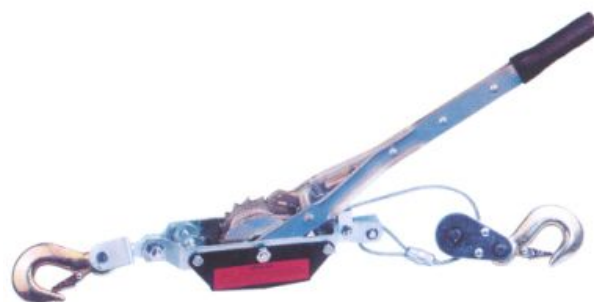


QSS1.5TA1



QSS2TE2



QSS1.5TA2

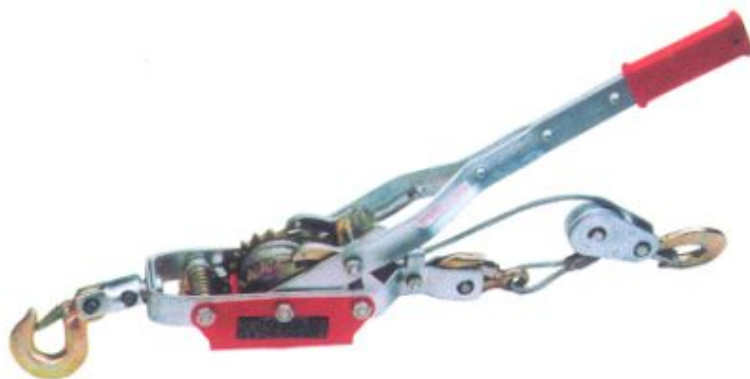


**QSS4TB2e**




**T10**



**T20**

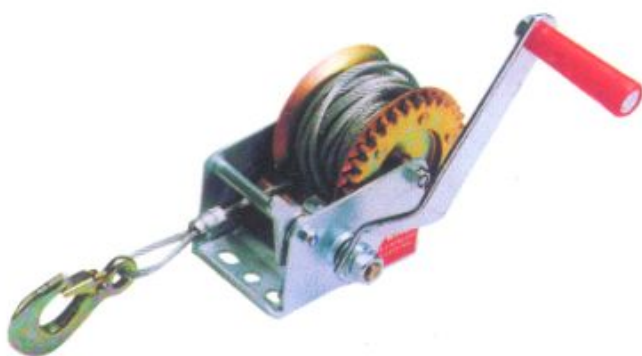

**T06**

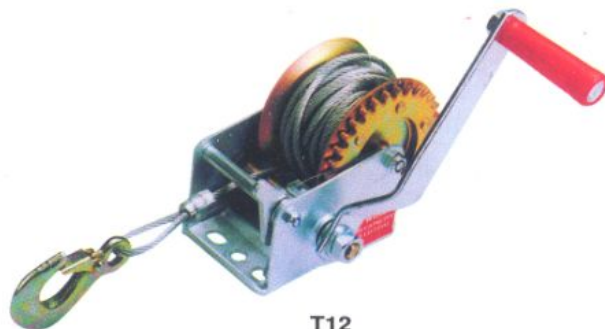

**T12**